


Ink “Slinging” Control

- Roller Alignment
- Correct Pan Mounting and Wiper Placement
- Splash Flap



Ink Slinging Control:


Roller Alignment

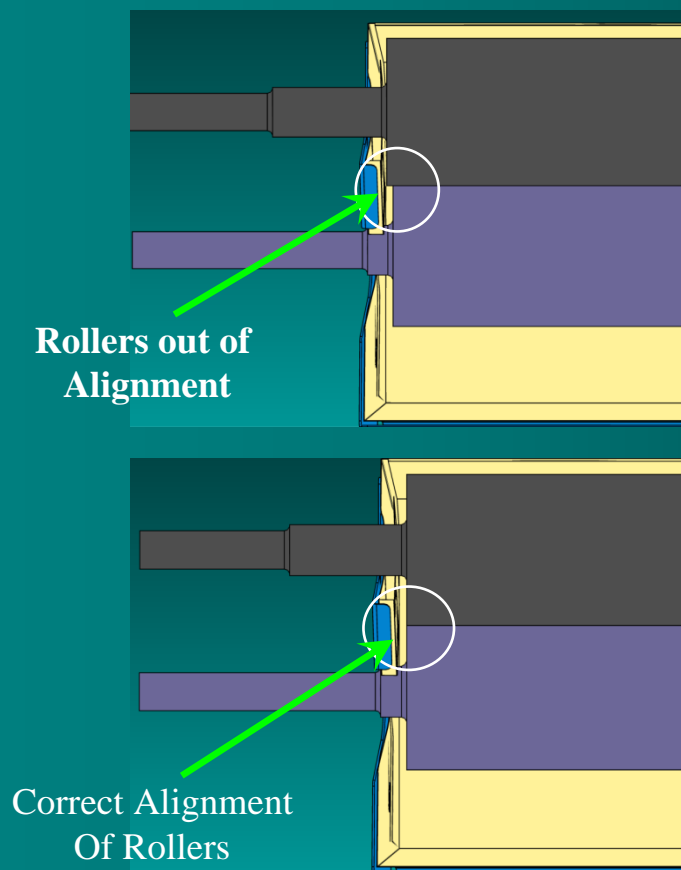

- Make Sure Rollers are aligned
- It doesn't matter what you are using to wipe with if the rollers are out of alignment, ink will sling.
- If rollers are different sizes, align the inboard side and monitor the outboard side
- Repair Chipped Rollers (Chipped Rollers eat wipers and Sling Ink around them)

Ink Slinging Control:

Correct Wiper Position

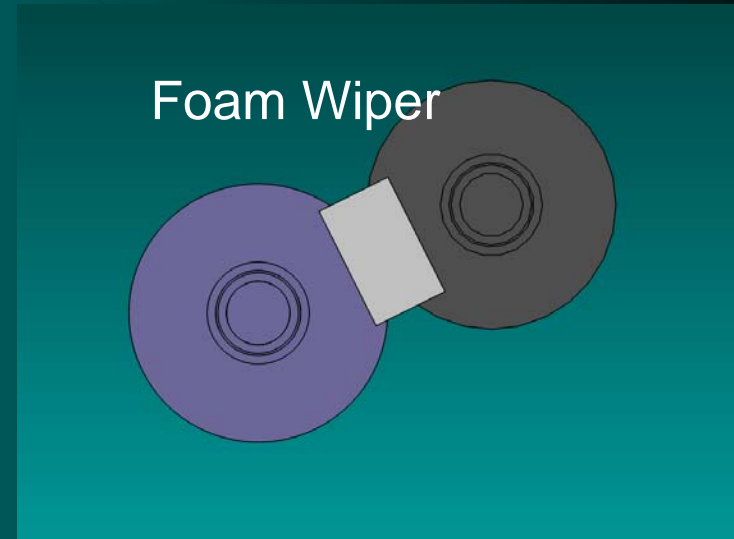

- Make sure the pans are mounted with the Wipers touching the rollers at the “Pinch Point”
- The WC2000 wiper’s Blocker Piece can be slightly off of the “Pinch Point”
- The sides of the Metal Retainer can be bent in or out to position the wipers correctly.

Ink Slinging Control:

Splash Flaps

- Splash Flap Rotated back to enable easy filling of the Liner
- Splash Flap Rotated over the pan to Prevent Ink Slinging

